



## HAILO S80 PROFISTEP DUO


2-section aluminium extending ladder. Height can be adjusted rung by rung.

### THE KEY FEATURES

- Practical locking system for both parts with lifting mechanism for easy height adjustment
- Wide uprights and rungs, extremely stable, double-beaded upright-rung joins
- Crosspiece with 2 large, stable claw feet

### OTHER PRODUCT ADVANTAGES

- Lifting and transport safety mechanism can be operated from one side, automatically engages after adjustment
- 2 sturdy, wide locking hooks
- Sturdy guide parts
- Length and cross-profiled rungs
- Non-slip surface contact feet
- Upright surface textured to provide comfortable grip
- Can be pulled apart to make two separate ladders (7209-007)
- Non-removable second ladder section (7212-007 / 7215-007 / 7218-007)
- Max. load capacity 150 kg

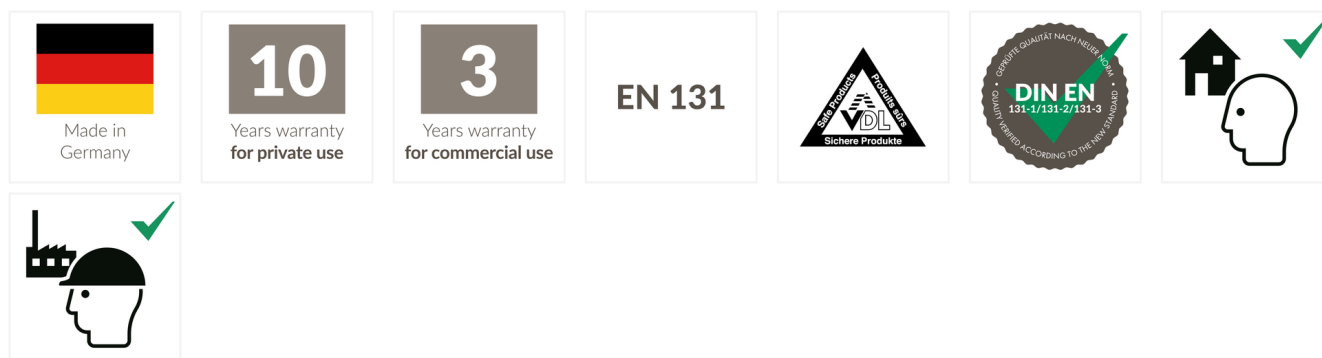

## SPECIFICATIONS

Level of equipment		4
Locking hook with transport locking mechanism		✓
Can be used as lean-to ladder		✓
Material		Aluminium / steel / plastic
Number of rungs		2 x 12
Width/depth required for setting up extending ladder		A = 110 cm, B = 154 cm
Height of extending ladder		575 cm
Max. working height		676 cm
Max. working height of extending ladder		676 cm
Dimensions of packaging (HxWxD)		A = 344 cm, B = 41 cm, C = 14 cm
Weight		13,5 kg
Load capacity		150 kg

